



NEXT GENERATION AUTOMATED LUBRICATION


Multiline “Spyder” pump



- Optimize your Component Life
- Maintenance Intervals are Optimized for your operation
- Clear (3.5 lbs capacity) reservoir for a clear grease level indicator
- Parts are compatible with leading brands
- Up to 26 lubrication points
- Suitable for EP0, EP1 and EP2 type lubricants

Lubecore Automated Lubrication Systems enhance your preventative maintenance program and keeps your greaseable components in excellent condition – resulting in safe and reliable equipment performance. This maintenance tool keeps your equipment on the road, earning you money!

Are you already an Automatic Greasing System user? Ask about the Lubecore Warranty Assumption Program

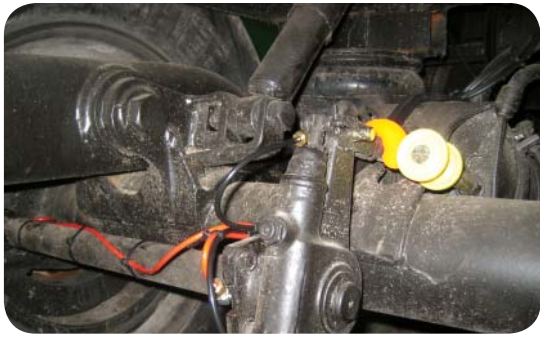

Multiline “Spyder” EP0-2

The Multiline “Spyder” Automated Lubrication System enhances the safe operation of your equipment by delivering continuous lubrication to critical components such as automatic brake adjusters, clevis pins, spring hangers, linkages, lift cylinders, turn tables, etc

The Multiline “Spyder” pump is an ideal system when cost is the main factor. The all-in-one design with straight forward operation provides a low cost solution with big maintenance savings potential.

The Multiline “Spyder” pump can be installed in various applications ranging from tractors and trailers in the transport sector to skid steers and mini-excavators in the construction sector. With application of the correct size and style of tubing, this system is capable of handling a wide range of lubricants, from EP0 to EP2.

The utilization of piston elements with 1/8” female thread allows a wide variety of couplings to be used and subsequently the “Spyder” pump has become an excellent choice as a replacement pump for competitive brands.

contact us today!



Lubecore™
7065 Twiss Road
Cambellville Ontario
Canada L0B 1B0
Tel 905 864 3110
www.lubecore.com
sales@lubecore.com

Lubecore turnkey solution

The Lubecore Automated Lubrication System is installed on your equipment by our trained professionals. Our expertise will guarantee that the automated lubrication system will meet your specific needs.

We also offer free, on-site training for your technicians and operators, which helps to familiarize them with the system and ensure years of trouble free system operation!

Features

The Multiline “Spyder” pump features an easily accessible integrated timer, mounted in the top of the pump reservoir cover, protected from moisture to prevent corrosion. The timer is adjustable by means of dip-switches. Depending on the type of lubricant used, the pump can be equipped with either a 1/4” quick disconnect or standard grease fitting for easy filling, so there is no need to have replacement cartridges on hand.

The switch mounted on the outside of the cover can be activated by means of a magnet (provided) to initiate a single lubrication cycle. The availability of 6 different sizes of injector pistons allow for optimum lubricant delivery to each of a maximum of 26 connected lubrication points.

